



**LED indicator
tower light
CL50ZYALS3**



- **Beeper: Sealed, pulsed tone max. 94 dB**
- **LED tower light**
- **Individually controllable**
- **Mechanical screw-in thread M30 x 1.5**
- **Protection class IP67**
- **Acoustic signaller, pulsed (COL 2)**
- **Monochrome: Yellow (COL 1)**
- **Cable, 2m**
- **Operating voltage 85...264 VAC**

Wiring diagram

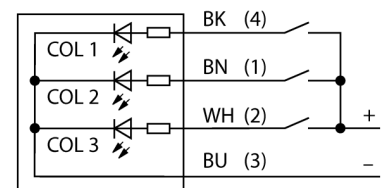

Functional principle

Multicolor/multifunction display
Rugged and well-priced LED tower, easy to install
Illuminated segments for clear operator guidance and display of system status.
Display of up to 3 colors.
Compact devices, no controller required
No mounting

Type code	CL50ZYALS3
Ident no.	3088181
Purpose	Indicator
Operating mode	tower light
Design	cylindrical/smooth
Housing material	plastic, ABS
Window material	Plastic, diffuse
Connection	cable, 4-wire
Cable length	2 m
Cable Jacket Material	PVC
Useful life	50000 h
IP Rating	IP67
Ambient temperature	-20...+50 °C
Approvals	CE, UL listed
Operating voltage U _s	≥ 85 VAC
Operating voltageU _s	≤ 264 VAC
Response time	< 10 ms
Light type	yellow
Beeper sound	Gepulst
Volume	92 dB