

Tubing and accessories

Tubes: reinforced PVC, Polyamide PA12, Hytrel Polyester, Polyethylene, PU.

Diameters: 4/2, 5/3, 6/4, 8/6, 10/8, 12/10, 15/12,5 mm



Camozzi offers a range of tubes and spirals with specific features which are suitable for several technical requirements. Thanks to high-quality raw materials and with a low specific weight, these products are very small and lightweight. They also show high resistance against stress and flexural vibrations.

The high specularity of internal surfaces for the fluid passage (roughness of about 6 micron) allows to reduce the loosening of loads and to reach very high flows with same diameters. Technopolymers used are particularly resistant to aging, thus ensuring the product a very long life.

Tubes Mod. PV

Tube in reinforced PVC

Colour: Blue



Mod.	D/d	Max pressure (bar) at 20 C°	Weight (g/m)	Bend radius (mm)	Lot (m)
PV 6/4	6/4	40	21.8	50	
PV 8/6	8/6	40	23.3	60	
PV 10/8	10/8	35	35.3	65	
PV 12/10	12/10	28	51	80	
PV 15/12,5	15/12.5	28	69	90	

Tubes Mod. TRN

Tube in polyamide PA12

 Colour (standard): neutral
 Colours available on request:
 Blue - Red - Green - Black - Yellow


Mod.	D/d	Max pressure (bar) at 23 C°	Weight (g/m)	Bend radius (mm)	Lot (m)
TRN 4/2	4/2	44	132	9,7	16
TRN 5/3	5/3	33	100	12,9	20
TRN 6/4	6/4	28	84	16,2	30
TRN 8/6	8/6	20	60	22,6	40
TRN 10/8	10/8	16	48	29,1	60
TRN 12/10	12/10	12	36	35,6	85

Tubes Mod. TRH

Tube in Hytel polyester

 Colour (standard): Blue
 Colours available on request:
 Red - Green - Black - Yellow - White

New

Mod.	D/d	Max pressure (bar) at 23 C°	Weight (g/m)	Bend radius (mm)	Lot (m)
TRH 4/2-Z	4/2	32	96	11,5	16
TRH 5/3-Z	5/3	27	80	15,3	25
TRH 6/4-Z	6/4	21	64	19,2	35
TRH 8/6-Z	8/6	15	44	26,8	65
TRH 10/8-Z	10/8	12	36	34,5	100
TRH 12/10-Z	12/10	10	30	42,1	125

Tubes Mod. TPE

Tube in low density polyethylene

Colours: neutral, Blue



Mod.	D/d	Max pressure (bar) at 23 C°	Weight (g/m)	Bend radius (mm)	Lot (m)
TPE 5/3	5/3	17	50	11,3	23
TPE 6/4	6/4	13	40	14,1	32
TPE 8/6	8/6	10	30	19,8	43
TPE 10/8	10/8	7	22	25,4	76

Tubes Mod. TPC

Tube in PU 98 Sh

Colour: Grey RAL 7012



Mod.	D/d	Max pressure (bar) at 23 C°	Weight (g/m)	Bend radius (mm)	Lot (m)
TPC 4/2	4/2	14	56	11,5	11
TPC 6/4	6/4	10	40	19,2	18
TPC 8/6	8/6	7	28	26,8	35
TPC 10/8	10/8	5,5	22	34,5	45
TPC 12/8	12/8	7	28	76,6	50

Tubes Mod. TSP

Spiral in Rilsan

Colour: Blue (other colours available on request)




Mod.	D/d	max pressure (bar) at 20°C	External Ø	Length (closed)	Max length
TSP 6/4	6/4	28	64	1000	15
TSP 8/6	8/6	20	86	1000	15
TSP 10/8	10/8	16	102	1050	15
TSP 12/10	12/10	12	126	1050	15

Tubes clamps Mod. MPL

Plastic tubes clamps

Colour: Blue

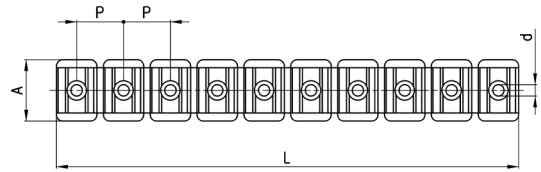

Mod.	Ø Tube	L	A	d	P	Nr of positions
MPL-4	4	115	19	2,5	11,5	10
MPL-6	6	115	19	2,5	11,5	10
MPL-8	8	144	19	3,5	14,5	10
MPL-10	10	172	19	4,5	17,5	10
MPL-12	12	78	19	4,5	20	4

Tubes cutters Mod. PNZ

Small and large tubes cutter



Mod.	
PNZ-12	able to cut tubes with Ø till to 12 mm
PNZ-25	able to cut tubes with Ø till to 25 mm

Plastic tubes cutter Mod. PNZP-12
New


Mod.	
PNZP-12	able to cut tubes with Ø till to 12 mm



NOTES

Blank lined area for notes, consisting of multiple horizontal lines for writing.