




Isolating Switching Amplifier MK13-22Ex0-T/24VDC MK13-22Ex0-T/230VAC 2-channel

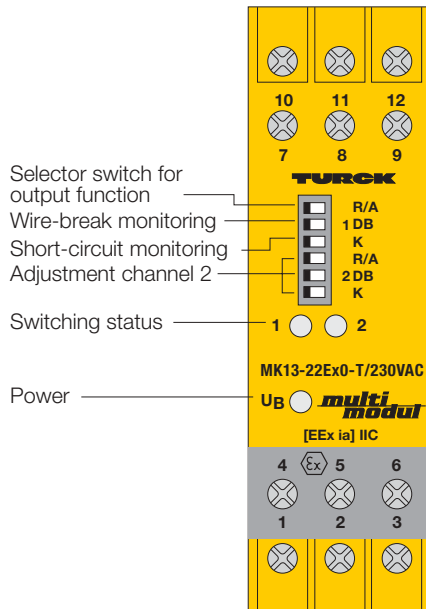

- **2-channel isolating switching amplifier**
- **Intrinsically safe input circuit EEx ia**
- **Area of application according to ATEX: II (1) GD**
- **Galvanic isolation between input circuits, output circuits and supply voltage**
- **Input circuit monitoring for wire-break and short-circuit (can be disabled)**
- **2 isolated, short-circuit and reverse polarity protected transistor outputs**
- **Selectable NO/NC output function**


The MK13-22Ex0-T type switching amplifiers are dual channel devices featuring intrinsically safe input circuits. They can be connected to sensors according to EN 60947-5-6 (NAMUR), variable resistors or potential-free contacts.

Each channel is equipped with a potential free, short-circuit protected and reverse polarity protected transistor output.



Six front panel programming switches select the output function of each channel (normally open mode = switch position A/ or normally closed mode = switch position R) and enable separate activation and de-activation of wire-break (switch position DB) and short-circuit (switch position K) monitoring of each channel.

When using mechanical contacts as the input device, wire-break and short-circuit monitoring must be disabled or shunt resistors must be connected to the contacts (II). (See next page for contact configuration).

The green LED indicates that the device is powered. The two dual colour LEDs indicate the switching status (yellow) as well as fault conditions (red). When the input circuit monitoring feature is activated, red illuminates to indicate a fault in the input circuit and the respective transistor output is disabled.

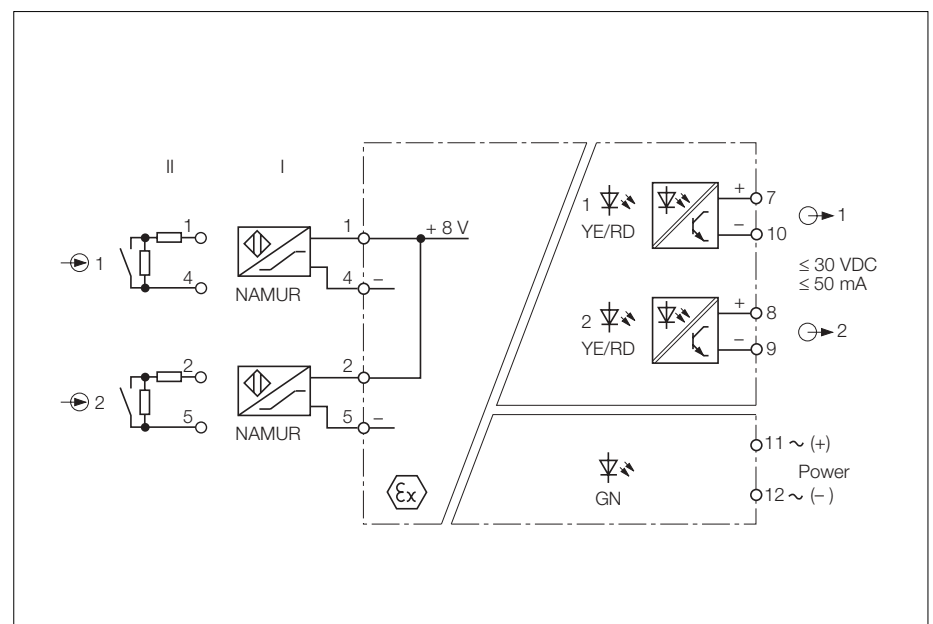

Isolating Switching Amplifier MK13-22Ex0-T

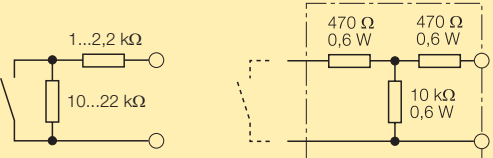Type	MK13-22Ex0-T/230VAC	MK13-22Ex0-T/24VDC
Ident-no.	7542120	7542127
Supply voltage U_B	196...253 VAC	10...30 VDC
Line frequency/ripple W_{PP}	48...62 Hz	$\leq 10\%$
Power/current consumption	$\leq 30\text{ mA}_{rms}$	$\leq 1.2\text{ W}$
Galvanic isolation	between input circuit, output circuit and supply voltage for 250 V_{rms} , test voltage 2.5 kV_{rms}	between input circuit, output circuit and supply voltage for 250 V_{rms} , test voltage 2.5 kV_{rms}
Input circuits	according to EN 60947-5-6 (NAMUR), intrinsically safe according to EN 50020	according to EN 60947-5-6 (NAMUR), intrinsically safe according to EN 50020
Operating characteristics		
– Voltage	8 V	8 V
– Current	8 mA	8 mA
Switching threshold	1.55 mA	1.55 mA
Hysteresis	typ. 0.2 mA	typ. 0.2 mA
Wire-break threshold	$\leq 0.1\text{ mA}$	$\leq 0.1\text{ mA}$
Short-circuit threshold	$\geq 6.0\text{ mA}$	$\geq 6.0\text{ mA}$
Contact configuration	 resistor module WM1, ident-no. 0912101	
Output circuits	2 transistor outputs potential-free, short-circuit protected	2 transistor outputs potential-free, short-circuit protected
Switching voltage	$\leq 30\text{ VDC}$	$\leq 30\text{ VDC}$
Switching current per output	$\leq 50\text{ mA}$	$\leq 50\text{ mA}$
Switching frequency	$\leq 3\text{ kHz}$	$\leq 3\text{ kHz}$
Voltage drop	$\leq 2.5\text{ V}$	$\leq 2.5\text{ V}$
Ex-approval acc. to certificate of conformity	PTB 99 ATEX 2083	PTB 99 ATEX 2083
Maximum nominal values		
– No load voltage U_0	$\leq 11.9\text{ V}$	$\leq 11.9\text{ V}$
– Short-circuit current I_0	$\leq 36\text{ mA}$	$\leq 36\text{ mA}$
Max. external inductances/capacitances L_0/C_0		
– [EEx ia] IIB	87 mH/9.4 μF	87 mH/9.4 μF
– [EEx ia] IIC	23 mH/1.45 μF	23 mH/1.45 μF
Marking of devices	II (1) G [EEx ia] IIC	II (1) G [EEx ia] IIC
LED indications		
– Power	green	green
– Switching status/fault indication	2 x yellow/red (2-colour LED)	2 x yellow/red (2-colour LED)
Housing	12-pole, 27 mm wide, Polycarbonate/ABS, flammability class V-0 per UL 94 snap-on clamps for top-hat rail (DIN 50022) or screw terminals for panel mounting via flat terminals with self-lifting pressure plates $\leq 2 \times 2.5\text{ mm}^2$ or $2 \times 1.5\text{ mm}^2$ with wire sleeves Degree of protection (IEC 60529/EN 60529) IP20 Operating temperature -25...+60 °C	
Mounting		
Connection		
Connection profile		