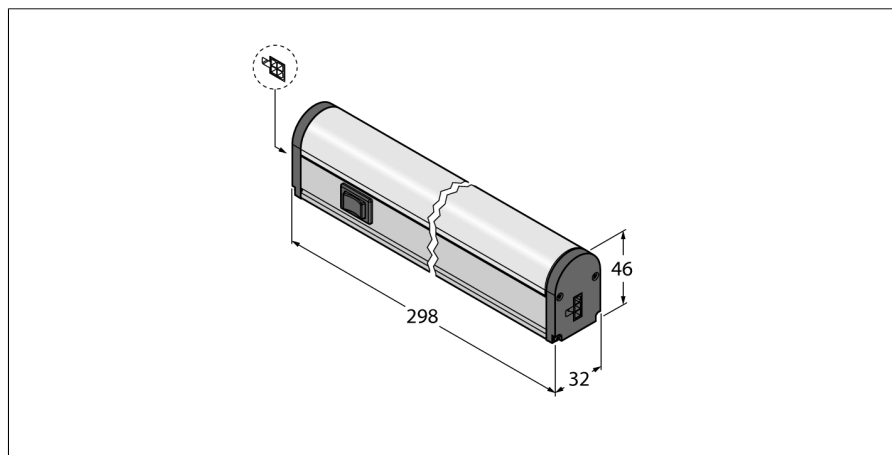


work light  
linear light  
WLB32ZC285PBQM

**TURCK**

Industrial  
Automation



- Cascadable
- ON/OFF switch
- Operating voltage: 90...264 VAC
- Color: Warm white

#### Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. The color temperature lies in the range of daylight, between 5,000 and 10,000 Kelvin. Despite the new, very bright LED-technology there is no glare. The lights can be easily daisy-chained, whereby each light can be switched off, 50% or 100 % luminosity with the DIP switch. The new technology provides a 40% higher energy efficiency than comparable lights.

These rugged lights in a metal housing are suitable for a wide range of applications, for example as machines or task lighting. The assembly is done via magnetic or snap-on brackets.

The work lights are available in four different lengths. For the AC variants there is a large variety of country-specific connectors available.



<b>Type code</b>	WLB32ZC285PBQM
Ident no.	3087489
<b>Purpose</b>	Work light
Operating mode	linear light
Cascadable	yes
Design	rectangular
Dimensions	298 x 32 x 46 mm
Housing material	anodized aluminium, AL
Window material	Plastic, diffuse
Useful life	50000 h
IP Rating	IP50
Approvals	CE, UL
<b>Operating voltage</b> $U_a$	$\geq 90$ VAC
Operating voltage $U_b$	$\leq 264$ VAC
<b>Light type</b>	white
Color temperature	4700...5300K
Luminous flux lumen	600 lm
Dimmable	2 steps

work light  
linear light  
WLB32ZC285PBQM


**TURCK**

Industrial  
Automation

## Accessories

Type code	Ident no.	Description	Design
LMBWLB32	3090623	Snap bracket for WLB32 work light, included in the WLB92 scope of delivery	
LMBWLB32MAG	3087851	Snap bracket for WLB32 work light, for mounting on metal surfaces	
LMBWLB32-180S	3087852	Snap bracket for WLB32 work light, rotatable up to 180° degrees	

## Wiring accessories

Type code	Ident no.	Description	Design
LQMAC-306	3086779	Connection cable, 3-wire, braid, not included in scope of delivery	
LQMAEC-306SS	3085580	Extension cable to cascade WLB32 lights, length 1.83 m, optional	