



**LED indicator  
Modular signal tower  
Base Module  
B-TL70-5**



- Plastic housing, black
- Protection class IP65
- EMI and RFI immune
- Cable, PVC, 2 m, 5-wire
- End element included in the delivery
- Operating voltage: 12...30 VDC
- Inputs: PNP/NPN
- Configuration via DIP switch

**Wiring diagram**

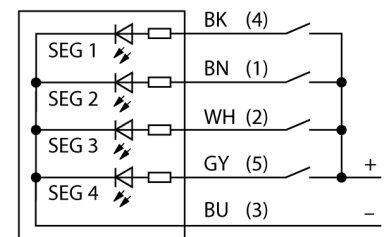

**Functional principle**


The rugged multifunction tower lights are available in many variations and are easily mounted. Each tower can be assembled of up to five color segments and, optionally, a beeper. All segments are configurable via DIP switches.

5 colors are available, blue (B), green (G), red (R), yellow (Y) and white (W), which can be used in any combination.

The arrangement of the segments can be modified subsequently and also more segments can be added. Via the basic module the respective port is selected.

The wiring diagram shows a PNP pin assignment.

<b>Type code</b>	B-TL70-5
Ident no.	3092223
<b>Purpose</b>	Indicator tower light
Operating mode	no
Cascadable	no
Design	cylindrical/smooth
Housing material	plastic, PC
Connection	cable, 5-wire
Cable length	2 m
Cable Jacket Material	PVC
IP Rating	IP65
Ambient temperature	-40...+50 °C
Approvals	CE, UL listed
<b>Operating voltage</b>	12...30VDC
<b>Dimmable</b>	no


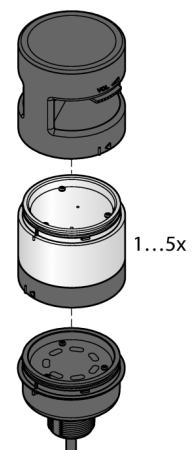


**LED indicator  
Modular signal tower  
Base Module  
B-TL70-5**

**TURCK**

Industrial  
Automation

**Function accessories**

Type code	Ident no.	Description	Design
SG-TL70-G	3092211	TL70 color segment, color: Green	
SG-TL70-Y	3092212	TL70 color segment, color: Yellow	
SG-TL70-R	3092213	TL70 color segment, color: Red	
SG-TL70-B	3092214	TL70 color segment, color: Blue	
SG-TL70-W	3092215	TL70 color segment, color: White	

**LED indicator  
Modular signal tower  
Base Module  
B-TL70-5**

**TURCK**

Industrial  
Automation

**Function accessories**

Type code	Ident no.	Description	Design
SG-TL70-A	3092221	TL70 audio segment, black	